

REFERENCE: SF-750125

PROJECT: 17BP.8.R.117

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
GEOTECHNICAL ENGINEERING UNIT

STRUCTURE
SUBSURFACE INVESTIGATION

COUNTY RANDOLPH
PROJECT DESCRIPTION BRIDGE NO. 125 ON SR 2106
(RACINE RD.) OVER LITTLE POLECAT CREEK

CONTENTS

SHEET NO.	DESCRIPTION
1	TITLE SHEET
2	LEGEND (SOIL & ROCK)
2A	SUPPLEMENTAL LEGEND (GSI)
3	SITE PLAN
4	PROFILE
5-6	CROSS SECTIONS
7-12	BORE LOGS, CORE REPORTS, & CORE PHOTOGRAPHS
13	ROCK TEST RESULTS
14	SITE PHOTOGRAPHS

STATE	STATE PROJECT REFERENCE NO.	SHEET NO.	TOTAL SHEETS
N.C.	SF-750125	1	15

CAUTION NOTICE

THE SUBSURFACE INFORMATION AND THE SUBSURFACE INVESTIGATION ON WHICH IT IS BASED WERE MADE FOR THE PURPOSE OF STUDY, PLANNING AND DESIGN, AND NOT FOR CONSTRUCTION OR PAY PURPOSES. THE VARIOUS FIELD BORING LOGS, ROCK CORES AND SOIL TEST DATA AVAILABLE MAY BE REVIEWED OR INSPECTED IN RALEIGH BY CONTACTING THE N. C. DEPARTMENT OF TRANSPORTATION, GEOTECHNICAL ENGINEERING UNIT AT (919) 707-6850. THE SUBSURFACE PLANS AND REPORTS, FIELD BORING LOGS, ROCK CORES AND SOIL TEST DATA ARE NOT PART OF THE CONTRACT.

GENERAL SOIL AND ROCK STRATA DESCRIPTIONS AND INDICATED BOUNDARIES ARE BASED ON A GEOTECHNICAL INTERPRETATION OF ALL AVAILABLE SUBSURFACE DATA AND MAY NOT NECESSARILY REFLECT THE ACTUAL SUBSURFACE CONDITIONS BETWEEN BORINGS OR BETWEEN SAMPLED STRATA WITHIN THE BOREHOLE. THE LABORATORY SAMPLE DATA AND THE IN SITU (IN-PLACE) TEST DATA CAN BE RELIED ON ONLY TO THE DEGREE OF RELIABILITY INHERENT IN THE STANDARD TEST METHOD. THE OBSERVED WATER LEVELS OR SOIL MOISTURE CONDITIONS INDICATED IN THE SUBSURFACE INVESTIGATIONS ARE AS RECORDED AT THE TIME OF THE INVESTIGATION. THESE WATER LEVELS OR SOIL MOISTURE CONDITIONS MAY VARY CONSIDERABLY WITH TIME ACCORDING TO CLIMATIC CONDITIONS INCLUDING TEMPERATURES, PRECIPITATION AND WIND, AS WELL AS OTHER NON-CLIMATIC FACTORS.

THE BIDDER OR CONTRACTOR IS CAUTIONED THAT DETAILS SHOWN ON THE SUBSURFACE PLANS ARE PRELIMINARY ONLY AND IN MANY CASES THE FINAL DESIGN DETAILS ARE DIFFERENT. FOR BIDDING AND CONSTRUCTION PURPOSES, REFER TO THE CONSTRUCTION PLANS AND DOCUMENTS FOR FINAL DESIGN INFORMATION ON THIS PROJECT. THE DEPARTMENT DOES NOT WARRANT OR GUARANTEE THE SUFFICIENCY OR ACCURACY OF THE INVESTIGATION MADE, NOR THE INTERPRETATIONS MADE, OR OPINION OF THE DEPARTMENT AS TO THE TYPE OF MATERIALS AND CONDITIONS TO BE ENCOUNTERED. THE BIDDER OR CONTRACTOR IS CAUTIONED TO MAKE SUCH INDEPENDENT SUBSURFACE INVESTIGATIONS AS HE DEEMS NECESSARY TO SATISFY HIMSELF AS TO CONDITIONS TO BE ENCOUNTERED ON THE PROJECT. THE CONTRACTOR SHALL HAVE NO CLAIM FOR ADDITIONAL COMPENSATION OR FOR AN EXTENSION OF TIME FOR ANY REASON RESULTING FROM THE ACTUAL CONDITIONS ENCOUNTERED AT THE SITE DIFFERING FROM THOSE INDICATED IN THE SUBSURFACE INFORMATION.

NOTES:

- THE INFORMATION CONTAINED HEREIN IS NOT IMPLIED OR GUARANTEED BY THE N. C. DEPARTMENT OF TRANSPORTATION AS ACCURATE NOR IS IT CONSIDERED PART OF THE PLANS, SPECIFICATIONS OR CONTRACT FOR THE PROJECT.
- BY HAVING REQUESTED THIS INFORMATION, THE CONTRACTOR SPECIFICALLY WAIVES ANY CLAIMS FOR INCREASED COMPENSATION OR EXTENSION OF TIME BASED ON DIFFERENCES BETWEEN THE CONDITIONS INDICATED HEREIN AND THE ACTUAL CONDITIONS AT THE PROJECT SITE.

PERSONNEL

D. KUBINSKI

T. WELLS

R. TOOTHMAN

W. ALLEN

INVESTIGATED BY B. JOHNSON

DRAWN BY T. WELLS

CHECKED BY X. BARRETT

SUBMITTED BY KLEINFELDER, INC.

DATE FEBRUARY 2017

Prepared in the Office of:



7343 WEST FRIENDLY AVE, SUITE B
GREENSBORO, NC 27410
NC FIRM LICENSE NO. F-1134



DocuSigned by:

Thomas R. Wells 3/1/2017

7DA5D2D0SIGNATURE DATE

DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED

NORTH CAROLINA DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
GEOTECHNICAL ENGINEERING UNIT
SUBSURFACE INVESTIGATION
SOIL AND ROCK LEGEND, TERMS, SYMBOLS, AND ABBREVIATIONS

SOIL DESCRIPTION

SOIL IS CONSIDERED UNCONSOLIDATED, SEMI-CONSOLIDATED, OR WEATHERED EARTH MATERIALS THAT CAN BE PENETRATED WITH A CONTINUOUS FLIGHT POWER AUGER AND YIELD LESS THAN 100 BLOWS PER FOOT ACCORDING TO THE STANDARD PENETRATION TEST (AASHTO T 208, ASTM D1586). SOIL CLASSIFICATION IS BASED ON THE AASHTO SYSTEM. BASIC DESCRIPTIONS GENERALLY INCLUDE THE FOLLOWING: CONSISTENCY, COLOR, TEXTURE, MOISTURE, AASHTO CLASSIFICATION, AND OTHER PERTINENT FACTORS SUCH AS MINERALOGICAL COMPOSITION, ANGULARITY, STRUCTURE, PLASTICITY, ETC. FOR EXAMPLE, *VERY STIFF, GRAY, SILTY CLAY, MOIST WITH INTERBEDDED FINE SAND LAYERS, HIGHLY PLASTIC, A-7-6*

SOIL LEGEND AND AASHTO CLASSIFICATION

GENERAL CLASS.	GRANULAR MATERIALS (≤ 35% PASSING #200)							SILT-CLAY MATERIALS (> 35% PASSING #200)							ORGANIC MATERIALS		
	A-1	A-1-b	A-1-c	A-2	A-2-4	A-2-5	A-2-6	A-2-7	A-4	A-5	A-6	A-7	A-1, A-2	A-3	A-4, A-5	A-6, A-7	
GROUP CLASS.	A-1-a	A-1-b		A-2-4	A-2-5	A-2-6	A-2-7					A-1, A-2	A-3	A-4, A-5	A-6, A-7		
SYMBOL																	
% PASSING #10 #40 #200	50 MX 30 MX 15 MX	50 MX 25 MX		51 MN 35 MX	40 MX 35 MX	40 MX 35 MX	40 MX 35 MX					36 MN 36 MN	36 MN 36 MN				
MATERIAL PASSING #40 LL PI	-	-		40 MX 10 MX	41 MN 10 MX	40 MX 11 MN	41 MN 11 MN					40 MX 10 MX	41 MN 11 MN				
GROUP INDEX	0	0		0	4 MX	8 MX	12 MX					16 MX	NO MX				
USUAL TYPES OF MAJOR MATERIALS	STONE FRAGS. GRAVEL, AND SAND	FINE SAND		SILTY OR CLAYEY GRAVEL AND SAND	SILTY SOILS	CLAYEY SOILS											
GEN. RATING AS SUBGRADE	EXCELLENT TO GOOD				FAIR TO POOR				FAIR TO POOR	POOR	UNSATURABLE						

PI OF A-7-5 SUBGROUP IS ≤ LL - 30 ; PI OF A-7-6 SUBGROUP IS > LL - 30

CONSISTENCY OR DENSENESS

PRIMARY SOIL TYPE	COMPACTNESS OR CONSISTENCY	RANGE OF STANDARD PENETRATION RESISTANCE (N-VALUE)	RANGE OF UNCONFINED COMPRESSIVE STRENGTH (TONS/FT ²)
GENERALLY GRANULAR MATERIAL (NON-COHESIVE)	VERY LOOSE LOOSE MEDIUM DENSE DENSE VERY DENSE	< 4 4 TO 10 10 TO 30 30 TO 50 > 50	N/A
GENERALLY SILT-CLAY MATERIAL (COHESIVE)	VERY SOFT SOFT MEDIUM STIFF STIFF VERY STIFF HARD	< 2 2 TO 4 4 TO 8 8 TO 15 15 TO 30 > 30	< 0.25 0.25 TO 0.5 0.5 TO 1.0 1 TO 2 2 TO 4 > 4

TEXTURE OR GRAIN SIZE

U.S. STD. SIEVE SIZE OPENING (MM)	4	10	40	60	200	270
	4.76	2.00	0.42	0.25	0.075	0.053
BOULDER (BLDR.)						
COBBLE (COB.)						
GRAVEL (GR.)						
COARSE SAND (CS, SD.)						
FINE SAND (F SD.)						
SILT (SL.)						
CLAY (CL.)						
GRAIN SIZE	305	75	2.0	0.25	0.05	0.005
MM						
IN.	12	3				

SOIL MOISTURE - CORRELATION OF TERMS

SOIL MOISTURE SCALE (ATTERBERG LIMITS)	FIELD MOISTURE DESCRIPTION	GUIDE FOR FIELD MOISTURE DESCRIPTION
LL - LIQUID LIMIT	- SATURATED - (SAT.)	USUALLY LIQUID; VERY WET, USUALLY FROM BELOW THE GROUND WATER TABLE
PL - PLASTIC LIMIT	- WET - (W)	SEMISOLID; REQUIRES DRYING TO ATTAIN OPTIMUM MOISTURE
OM - OPTIMUM MOISTURE SHRINKAGE LIMIT	- MOIST - (M)	SOLID; AT OR NEAR OPTIMUM MOISTURE
SL - SHRINKAGE LIMIT	- DRY - (D)	REQUIRES ADDITIONAL WATER TO ATTAIN OPTIMUM MOISTURE

PLASTICITY

	PLASTICITY INDEX (PI)	DRY STRENGTH
NON PLASTIC	0-5	VERY LOW
SLIGHTLY PLASTIC	6-15	SLIGHT
MODERATELY PLASTIC	16-25	MEDIUM
HIGHLY PLASTIC	26 OR MORE	HIGH

COLOR

DESCRIPTIONS MAY INCLUDE COLOR OR COLOR COMBINATIONS (TAN, RED, YELLOW-BROWN, BLUE-GRAY). MODIFIERS SUCH AS LIGHT, DARK, STREAKED, ETC. ARE USED TO DESCRIBE APPEARANCE.

GRADATION

WELL GRADED - INDICATES A GOOD REPRESENTATION OF PARTICLE SIZES FROM FINE TO COARSE.
UNIFORMLY GRADED - INDICATES THAT SOIL PARTICLES ARE ALL APPROXIMATELY THE SAME SIZE.
GAP-GRADED - INDICATES A MIXTURE OF UNIFORM PARTICLE SIZES OF TWO OR MORE SIZES.

ANGULARITY OF GRAINS

THE ANGULARITY OR ROUNDNESS OF SOIL GRAINS IS DESIGNATED BY THE TERMS: **ANGULAR, SUBANGULAR, SUBROUNDED, OR ROUNDED.**

MINERALOGICAL COMPOSITION

MINERAL NAMES SUCH AS QUARTZ, FELDSPAR, MICA, TALC, KAOLIN, ETC. ARE USED IN DESCRIPTIONS WHEN THEY ARE CONSIDERED OF SIGNIFICANCE.

COMPRESSIBILITY

SLIGHTLY COMPRESSIBLE LL < 31
 MODERATELY COMPRESSIBLE LL = 31 - 50
 HIGHLY COMPRESSIBLE LL > 50

PERCENTAGE OF MATERIAL

	GRANULAR SOILS	SILT - CLAY SOILS	OTHER MATERIAL
ORGANIC MATERIAL			
TRACE OF ORGANIC MATTER	2 - 3%	3 - 5%	TRACE 1 - 10%
LITTLE ORGANIC MATTER	3 - 5%	5 - 12%	LITTLE 10 - 20%
MODERATELY ORGANIC	5 - 10%	12 - 20%	SOME 20 - 35%
HIGHLY ORGANIC	> 10%	> 20%	HIGHLY 35% AND ABOVE

GROUND WATER

- WATER LEVEL IN BORE HOLE IMMEDIATELY AFTER DRILLING
- STATIC WATER LEVEL AFTER 24 HOURS
- PERCHED WATER, SATURATED ZONE, OR WATER BEARING STRATA
- SPRING OR SEEP

MISCELLANEOUS SYMBOLS

- ROADWAY EMBANKMENT (RE) WITH SOIL DESCRIPTION
- SOIL SYMBOL
- ARTIFICIAL FILL (AF) OTHER THAN ROADWAY EMBANKMENT
- INFERRERD SOIL BOUNDARY
- INFERRERD ROCK LINE
- ALLUVIAL SOIL BOUNDARY
- DIP & DIP DIRECTION OF ROCK STRUCTURES
- SPT TEST BORING
- AUGER BORING
- CORE BORING
- MONITORING WELL
- PIEZOMETER INSTALLATION
- SLOPE INDICATOR INSTALLATION
- CONE PENETROMETER TEST
- SOUNDING ROD
- TEST BORING WITH CORE
- SPT N-VALUE

RECOMMENDATION SYMBOLS

- UNDERCUT
- SHALLOW UNDERCUT
- UNCLASSIFIED EXCAVATION - UNSUITABLE WASTE
- UNCLASSIFIED EXCAVATION - ACCEPTABLE DEGRADABLE ROCK
- UNCLASSIFIED EXCAVATION - ACCEPTABLE, BUT NOT TO BE USED IN THE TOP 3 FEET OF EMBANKMENT OR BACKFILL

ABBREVIATIONS

- AR - AUGER REFUSAL
- BT - BORING TERMINATED
- CL - CLAY
- CPT - COANE PENETRATION TEST
- CSE - COARSE
- DMT - DILATOMETER TEST
- DPT - DYNAMIC PENETRATION TEST
- e - VOID RATIO
- F - FINE
- FOSS. - FOSSILIFEROUS
- FRAC. - FRACTURED, FRACTURES
- FRAGS. - FRAGMENTS
- HI. - HIGHLY
- MED. - MEDIUM
- MICA. - MICACEOUS
- MOD. - MODERATELY
- NP - NON PLASTIC
- ORG. - ORGANIC
- PMT - PRESSUREMETER TEST
- SAP. - SAPROLITIC
- SD. - SAND, SANDY
- SL. - SILT, SILTY
- SLI. - SLIGHTLY
- TCR - TRICONE REFUSAL
- w - MOISTURE CONTENT
- V - VERY
- VST - VANE SHEAR TEST
- WEA. - WEATHERED
- W - UNIT WEIGHT
- W_d - DRY UNIT WEIGHT
- S - BULK
- SS - SPLIT SPOON
- ST - SHELBY TUBE
- RS - ROCK
- RT - RECOMPACTED TRIAXIAL
- CBR - CALIFORNIA BEARING RATIO

EQUIPMENT USED ON SUBJECT PROJECT

- DRILL UNITS:
 - CME-45C
 - CME-55
 - CME-550
 - VANE SHEAR TEST
 - PORTABLE HOIST
 - MOBILE B-57
- ADVANCING TOOLS:
 - CLAY BITS
 - 6" CONTINUOUS FLIGHT AUGER
 - 8" HOLLOW AUGERS
 - HARD FACED FINGER BITS
 - TUNG-CARBIDE INSERTS
 - CASING W/ ADVANCER
 - TRICONE STEEL TEETH
 - TRICONE 2-1/4" TUNG-CARB.
 - CORE BIT
- HAMMER TYPE:
 - AUTOMATIC MANUAL
- CORE SIZE:
 - B -H
 - N Q
- HAND TOOLS:
 - POST HOLE DIGGER
 - HAND AUGER
 - SOUNDING ROD
 - VANE SHEAR TEST

ROCK DESCRIPTION

HARD ROCK IS NON-COASTAL PLAIN MATERIAL THAT WOULD YIELD SPT REFUSAL IF TESTED. AN INFERRED ROCK LINE INDICATES THE LEVEL AT WHICH NON-COASTAL PLAIN MATERIAL WOULD YIELD SPT REFUSAL. SPT REFUSAL IS PENETRATION BY A SPLIT SPOON SAMPLER EQUAL TO OR LESS THAN 0.1 FOOT PER 60 BLOWS IN NON-COASTAL PLAIN MATERIAL. THE TRANSITION BETWEEN SOIL AND ROCK IS OFTEN REPRESENTED BY A ZONE OF WEATHERED ROCK. ROCK MATERIALS ARE TYPICALLY DIVIDED AS FOLLOWS:

- WEATHERED ROCK (WR) - NON-COASTAL PLAIN MATERIAL THAT WOULD YIELD SPT N VALUES > 100 BLOWS PER FOOT IF TESTED.
- CRYSTALLINE ROCK (CR) - FINE TO COARSE GRAIN IGNEOUS AND METAMORPHIC ROCK THAT WOULD YIELD SPT REFUSAL IF TESTED. ROCK TYPE INCLUDES GRANITE, GNEISS, GABBRO, SCHIST, ETC.
- NON-CRYSTALLINE ROCK (NCR) - FINE TO COARSE GRAIN METAMORPHIC AND NON-COASTAL PLAIN SEDIMENTARY ROCK THAT WOULD YIELD SPT REFUSAL IF TESTED. ROCK TYPE INCLUDES PHYLLITE, SLATE, SANDSTONE, ETC.
- COASTAL PLAIN SEDIMENTARY ROCK (CP) - COASTAL PLAIN SEDIMENTS CEMENTED INTO ROCK, BUT MAY NOT YIELD SPT REFUSAL. ROCK TYPE INCLUDES LIMESTONE, SANDSTONE, CEMENTED SHELL BEDS, ETC.

WEATHERING

- FRESH** - ROCK FRESH, CRYSTALS BRIGHT, FEW JOINTS MAY SHOW SLIGHT STAINING. ROCK RINGS UNDER HAMMER IF CRYSTALLINE.
- VERY SLIGHT (V SL.)** - ROCK GENERALLY FRESH, JOINTS STAINED, SOME JOINTS MAY SHOW THIN CLAY COATINGS IF OPEN. CRYSTALS ON A BROKEN SPECIMEN FACE SHINE BRIGHTLY. ROCK RINGS UNDER HAMMER BLOWS IF OF A CRYSTALLINE NATURE.
- SLIGHT (SL.)** - ROCK GENERALLY FRESH, JOINTS STAINED AND DISCOLORATION EXTENDS INTO ROCK UP TO 1 INCH. OPEN JOINTS MAY CONTAIN CLAY. IN GRANITOID ROCKS SOME OCCASIONAL FELDSPAR CRYSTALS ARE DULL AND DISCOLORED. CRYSTALLINE ROCKS RING UNDER HAMMER BLOWS.
- MODERATE (MOD.)** - SIGNIFICANT PORTIONS OF ROCK SHOW DISCOLORATION AND WEATHERING EFFECTS. IN GRANITOID ROCKS, MOST FELDSPARS ARE DULL AND DISCOLORED, SOME SHOW CLAY. ROCK HAS DULL SOUND UNDER HAMMER BLOWS AND SHOWS SIGNIFICANT LOSS OF STRENGTH AS COMPARED WITH FRESH ROCK.
- MODERATELY SEVERE (MOD. SEV.)** - ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED. IN GRANITOID ROCKS, ALL FELDSPARS DULL AND DISCOLORED AND A MAJORITY SHOW KAOLINIZATION. ROCK SHOWS SEVERE LOSS OF STRENGTH AND CAN BE EXCAVATED WITH A GEOLOGIST'S PICK. ROCK GIVES "CLUNK" SOUND WHEN STRUCK. *IF TESTED, WOULD YIELD SPT REFUSAL*
- SEVERE (SEV.)** - ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED. ROCK FABRIC CLEAR AND EVIDENT BUT REDUCED IN STRENGTH TO STRONG SOIL. IN GRANITOID ROCKS ALL FELDSPARS ARE KAOLINIZED TO SOME EXTENT. SOME FRAGMENTS OF STRONG ROCK USUALLY REMAIN. *IF TESTED, WOULD YIELD SPT N VALUES > 100 BPF*
- VERY SEVERE (V SEV.)** - ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED. ROCK FABRIC ELEMENTS ARE DISCERNIBLE BUT MASS IS EFFECTIVELY REDUCED TO SOIL STATUS, WITH ONLY FRAGMENTS OF STRONG ROCK REMAINING. SAPROLITE IS AN EXAMPLE OF ROCK WEATHERED TO A DEGREE THAT ONLY MINOR VESTIGES OF ORIGINAL ROCK FABRIC REMAIN. *IF TESTED, WOULD YIELD SPT N VALUES < 100 BPF*
- COMPLETE** - ROCK REDUCED TO SOIL. ROCK FABRIC NOT DISCERNIBLE, OR DISCERNIBLE ONLY IN SMALL AND SCATTERED CONCENTRATIONS. FABRIC MAY BE PRESENT AS DIKES OR STRINGERS. SAPROLITE IS ALSO AN EXAMPLE.

ROCK HARDNESS

- VERY HARD** - CANNOT BE SCRATCHED BY KNIFE OR SHARP PICK. BREAKING OF HAND SPECIMENS REQUIRES SEVERAL HARD BLOWS OF THE GEOLOGIST'S PICK.
- HARD** - CAN BE SCRATCHED BY KNIFE OR PICK ONLY WITH DIFFICULTY. HARD HAMMER BLOWS REQUIRED TO DETACH HAND SPECIMEN.
- MODERATELY HARD** - CAN BE SCRATCHED BY KNIFE OR PICK. GOUGES OR GROOVES TO 0.25 INCHES DEEP CAN BE EXCAVATED BY HARD BLOW OF A GEOLOGIST'S PICK. HAND SPECIMENS CAN BE DETACHED BY MODERATE BLOWS.
- MEDIUM HARD** - CAN BE GROOVED OR GOUGED 0.05 INCHES DEEP BY FIRM PRESSURE OF KNIFE OR PICK POINT. CAN BE EXCAVATED IN SMALL CHIPS TO PIECES 1 INCH MAXIMUM SIZE BY HARD BLOWS OF THE POINT OF A GEOLOGIST'S PICK.
- SOFT** - CAN BE GROOVED OR GOUGED READILY BY KNIFE OR PICK. CAN BE EXCAVATED IN FRAGMENTS FROM CHIPS TO SEVERAL INCHES IN SIZE BY MODERATE BLOWS OF A PICK POINT. SMALL, THIN PIECES CAN BE BROKEN BY FINGER PRESSURE.
- VERY SOFT** - CAN BE CARVED WITH KNIFE. CAN BE EXCAVATED READILY WITH POINT OF PICK. PIECES 1 INCH OR MORE IN THICKNESS CAN BE BROKEN BY FINGER PRESSURE. CAN BE SCRATCHED READILY BY FINGER NAIL.

FRACTURE SPACING

TERM	SPACING
VERY WIDE	MORE THAN 10 FEET
WIDE	3 TO 10 FEET
MODERATELY CLOSE	1 TO 3 FEET
CLOSE	0.16 TO 1 FOOT
VERY CLOSE	LESS THAN 0.16 FEET

BEDDING

TERM	THICKNESS
VERY THICKLY BEDDED	4 FEET
THICKLY BEDDED	1.5 - 4 FEET
THINLY BEDDED	0.16 - 1.5 FEET
VERY THINLY BEDDED	0.03 - 0.16 FEET
THICKLY LAMINATED	0.008 - 0.03 FEET
THINLY LAMINATED	< 0.008 FEET

INDURATION

- FOR SEDIMENTARY ROCKS, INDURATION IS THE HARDENING OF MATERIAL BY CEMENTING, HEAT, PRESSURE, ETC.**
- FRIABLE** - RUBBING WITH FINGER FREES NUMEROUS GRAINS; GENTLE BLOW BY HAMMER DISINTEGRATES SAMPLE.
- MODERATELY INDURATED** - GRAINS CAN BE SEPARATED FROM SAMPLE WITH STEEL PROBE; BREAKS EASILY WHEN HIT WITH HAMMER.
- INDURATED** - GRAINS ARE DIFFICULT TO SEPARATE WITH STEEL PROBE; DIFFICULT TO BREAK WITH HAMMER.
- EXTREMELY INDURATED** - SHARP HAMMER BLOWS REQUIRED TO BREAK SAMPLE; SAMPLE BREAKS ACROSS GRAINS.

TERMS AND DEFINITIONS

- ALLUVIUM (ALLUV.)** - SOILS THAT HAVE BEEN TRANSPORTED BY WATER.
- AQUIFER** - A WATER BEARING FORMATION OR STRATA.
- ARENACEOUS** - APPLIED TO ROCKS THAT HAVE BEEN DERIVED FROM SAND OR THAT CONTAIN SAND.
- ARGILLACEOUS** - APPLIED TO ALL ROCKS OR SUBSTANCES COMPOSED OF CLAY MINERALS, OR HAVING A NOTABLE PROPORTION OF CLAY IN THEIR COMPOSITION, SUCH AS SHALE, SLATE, ETC.
- ARTESIAN** - GROUND WATER THAT IS UNDER SUFFICIENT PRESSURE TO RISE ABOVE THE LEVEL AT WHICH IT IS ENCOUNTERED, BUT WHICH DOES NOT NECESSARILY RISE TO OR ABOVE THE GROUND SURFACE.
- CALCAREOUS (CALC.)** - SOILS THAT CONTAIN APPRECIABLE AMOUNTS OF CALCIUM CARBONATE.
- COLLUVIUM** - ROCK FRAGMENTS MIXED WITH SOIL DEPOSITED BY GRAVITY ON SLOPE OR AT BOTTOM OF SLOPE.
- CORE RECOVERY (REC.)** - TOTAL LENGTH OF ALL MATERIAL RECOVERED IN THE CORE BARREL DIVIDED BY TOTAL LENGTH OF CORE RUN AND EXPRESSED AS A PERCENTAGE.
- DIKE** - A TABULAR BODY OF IGNEOUS ROCK THAT CUTS ACROSS THE STRUCTURE OF ADJACENT ROCKS OR CUTS MASSIVE ROCK.
- DIP** - THE ANGLE AT WHICH A STRATUM OR ANY PLANAR FEATURE IS INCLINED FROM THE HORIZONTAL.
- DIP DIRECTION (DIP AZIMUTH)** - THE DIRECTION OR BEARING OF THE HORIZONTAL TRACE OF THE LINE OF DIP, MEASURED CLOCKWISE FROM NORTH.
- FAULT** - A FRACTURE OR FRACTURE ZONE ALONG WHICH THERE HAS BEEN DISPLACEMENT OF THE SIDES RELATIVE TO ONE ANOTHER PARALLEL TO THE FRACTURE.
- FISSILE** - A PROPERTY OF SPLITTING ALONG CLOSELY SPACED PARALLEL PLANES.
- FLOAT** - ROCK FRAGMENTS ON SURFACE NEAR THEIR ORIGINAL POSITION AND DISLOADED FROM PARENT MATERIAL.
- FLOOD PLAIN (FP)** - LAND BORDERING A STREAM, BUILT OF SEDIMENTS DEPOSITED BY THE STREAM.
- FORMATION (FM.)** - A MAPPABLE GEOLOGIC UNIT THAT CAN BE RECOGNIZED AND TRACED IN THE FIELD.
- JOINT** - FRACTURE IN ROCK ALONG WHICH NO APPRECIABLE MOVEMENT HAS OCCURRED.
- LEDGE** - A SHELF-LIKE RIDGE OR PROJECTION OF ROCK WHOSE THICKNESS IS SMALL COMPARED TO ITS LATERAL EXTENT.
- LENS** - A BODY OF SOIL OR ROCK THAT THINS OUT IN ONE OR MORE DIRECTIONS.
- MOTTLED (MOT.)** - IRREGULARLY MARKED WITH SPOTS OF DIFFERENT COLORS. MOTTLING IN SOILS USUALLY INDICATES POOR AERATION AND LACK OF GOOD DRAINAGE.
- PERCHED WATER** - WATER MAINTAINED ABOVE THE NORMAL GROUND WATER LEVEL BY THE PRESENCE OF AN INTERVENING IMPERVIOUS STRATUM.
- RESIDUAL (RES.) SOIL** - SOIL FORMED IN PLACE BY THE WEATHERING OF ROCK.
- ROCK QUALITY DESIGNATION (ROD)** - A MEASURE OF ROCK QUALITY DESCRIBED BY TOTAL LENGTH OF ROCK SEGMENTS EQUAL TO OR GREATER THAN 4 INCHES DIVIDED BY THE TOTAL LENGTH OF CORE RUN AND EXPRESSED AS A PERCENTAGE.
- SAPROLITE (SAP.)** - RESIDUAL SOIL THAT RETAINS THE RELIC STRUCTURE OR FABRIC OF THE PARENT ROCK.
- SILL** - AN INTRUSIVE BODY OF IGNEOUS ROCK OF APPROXIMATELY UNIFORM THICKNESS AND RELATIVELY THIN COMPARED WITH ITS LATERAL EXTENT, THAT HAS BEEN EMPLACED PARALLEL TO THE BEDDING OR SCHISTOSITY OF THE INTRUDED ROCKS.
- SLICKENSIDE** - POLISHED AND STRIATED SURFACE THAT RESULTS FROM FRICTION ALONG A FAULT OR SLIP PLANE.
- STANDARD PENETRATION TEST (PENETRATION RESISTANCE) (SPT)** - NUMBER OF BLOWS (N OR BPF) OF A 140 LB. HAMMER FALLING 30 INCHES REQUIRED TO PRODUCE A PENETRATION OF 1 FOOT INTO SOIL WITH A 2 INCH OUTSIDE DIAMETER SPLIT SPOON SAMPLER. SPT REFUSAL IS PENETRATION EQUAL TO OR LESS THAN 0.1 FOOT PER 60 BLOWS.
- STRATA CORE RECOVERY (SREC.)** - TOTAL LENGTH OF STRATA MATERIAL RECOVERED DIVIDED BY TOTAL LENGTH OF STRATUM AND EXPRESSED AS A PERCENTAGE.
- STRATA ROCK QUALITY DESIGNATION (SROD)** - A MEASURE OF ROCK QUALITY DESCRIBED BY TOTAL LENGTH OF ROCK SEGMENTS WITHIN A STRATUM EQUAL TO OR GREATER THAN 4 INCHES DIVIDED BY THE TOTAL LENGTH OF STRATA AND EXPRESSED AS A PERCENTAGE.
- TOPSOIL (TS.)** - SURFACE SOILS USUALLY CONTAINING ORGANIC MATTER.

BENCH MARK: BL-2 STA. 10+26 -BL- (773,112 FT N, 1,776,537 FT E)

ELEVATION: 675.93 FEET

NOTES:

- FIAD - FILLED IMMEDIATELY AFTER DRILLING
- DOWNSLOPE TOP OF RAIL ELEVATIONS
- EB1 - 678.7 FEET
- EB2 - 678.8 FEET








NORTH CAROLINA DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
GEOTECHNICAL ENGINEERING UNIT


SUBSURFACE INVESTIGATION

SUPPLEMENTAL LEGEND, GEOLOGICAL STRENGTH INDEX (GSI) TABLES
FROM AASHTO LRFD BRIDGE DESIGN SPECIFICATIONS

AASHTO LRFD Figure 10.4.6.4-1 — Determination of GSI for Jointed Rock Mass (Marinos and Hoek, 2000)

AASHTO LRFD Figure 10.4.6.4-2 — Determination of GSI for Tectonically Deformed Heterogeneous Rock Masses (Marinos and Hoek, 2000)

<p>GEOLOGICAL STRENGTH INDEX (GSI) FOR JOINTED ROCKS (Hoek and Marinos, 2000)</p> <p>From the lithology, structure and surface conditions of the discontinuities, estimate the average value of GSI. Do not try to be too precise. Quoting a range from 33 to 37 is more realistic than stating that GSI = 35. Note that the table does not apply to structurally controlled failures. Where weak planar structural planes are present in an unfavorable orientation with respect to the excavation face, these will dominate the rock mass behaviour. The shear strength of surfaces in rocks that are prone to deterioration as a result of changes in moisture content will be reduced if water is present. When working with rocks in the fair to very poor categories, a shift to the right may be made for wet conditions. Water pressure is dealt with by effective stress analysis.</p> <p>STRUCTURE</p>	<p>SURFACE CONDITIONS</p> <p>VERY GOOD Very rough, fresh unweathered surfaces</p> <p>GOOD Rough, slightly weathered, iron stained surfaces</p> <p>FAIR Smooth, moderately weathered and altered surfaces</p> <p>POOR Slickensided, highly weathered surfaces with compact coatings or fillings or angular fragments</p> <p>VERY POOR Slickensided, highly weathered surfaces with soft clay coatings or fillings</p> <p>DECREASING SURFACE QUALITY →</p>					<p>GSI FOR HETEROGENEOUS ROCK MASSES SUCH AS FLYSCH (Marinos, P and Hoek E., 2000)</p> <p>From a description of the lithology, structure and surface conditions (particularly of the bedding planes), choose a box in the chart. Locate the position in the box that corresponds to the condition of the discontinuities and estimate the average value of GSI from the contours. Do not attempt to be too precise. Quoting a range from 33 to 37 is more realistic than giving GSI = 35. Note that the Hoek-Brown criterion does not apply to structurally controlled failures. Where unfavourably oriented continuous weak planar discontinuities are present, these will dominate the behaviour of the rock mass. The strength of some rock masses is reduced by the presence of groundwater and this can be allowed for by a slight shift to the right in the columns for fair, poor and very poor conditions. Water pressure does not change the value of GSI and it is dealt with by using effective stress analysis.</p> <p>COMPOSITION AND STRUCTURE</p>	<p>SURFACE CONDITIONS OF DISCONTINUITIES (Predominantly bedding planes)</p> <p>VERY GOOD - Very Rough, fresh unweathered surfaces</p> <p>GOOD - Rough, slightly weathered surfaces</p> <p>FAIR - Smooth, moderately weathered and altered surfaces</p> <p>POOR - Very smooth, occasionally slickensided surfaces with compact coatings or fillings with angular fragments</p> <p>VERY POOR - Very smooth, slickensided or highly weathered surfaces with soft clay coatings or fillings</p>										
<p>INTERLOCKING OF ROCK PIECES</p> <p>DECREASING INTERLOCKING OF ROCK PIECES ↓</p> <p> INTACT OR MASSIVE - intact rock specimens or massive in situ rock with few widely spaced discontinuities</p> <p> BLOCKY - well interlocked undisturbed rock mass consisting of cubical blocks formed by three intersecting discontinuity sets</p> <p> VERY BLOCKY - interlocked, partially disturbed mass with multi-faceted angular blocks formed by 4 or more joint sets</p> <p> BLOCKY/DISTURBED/SEAMY - folded with angular blocks formed by many intersecting discontinuity sets. Persistence of bedding planes or schistosity</p> <p> DISINTEGRATED - poorly interlocked, heavily broken rock mass with mixture of angular and rounded rock pieces</p> <p> LAMINATED/SHEARED - Lack of blockiness due to close spacing of weak schistosity or shear planes</p>	90	80	70	60	50	40	30	20	10	N/A	70	60	50	40	30	20	10
<p> A. Thick bedded, very blocky sandstone The effect of pelitic coatings on the bedding planes is minimized by the confinement of the rock mass. In shallow tunnels or slopes these bedding planes may cause structurally controlled instability.</p> <p> B. Sandstone with thin inter-layers of siltstone</p> <p> C. Sandstone and siltstone in similar amounts</p> <p> D. Siltstone or silty shale with sandstone layers</p> <p> E. Weak siltstone or clayey shale with sandstone layers</p> <p>C, D, E, and G - may be more or less folded than illustrated but this does not change the strength. Tectonic deformation, faulting and loss of continuity moves these categories to F and H.</p> <p> F. Tectonically deformed, intensively folded/faulted, sheared clayey shale or siltstone with broken and deformed sandstone layers forming an almost chaotic structure</p> <p> G. Undisturbed silty or clayey shale with or without a few very thin sandstone layers</p> <p> H. Tectonically deformed silty or clayey shale forming a chaotic structure with pockets of clay. Thin layers of sandstone are transformed into small rock pieces.</p> <p>→ Means deformation after tectonic disturbance</p>	<p>STRUCTURE</p> <p>VERY GOOD - Very Rough, fresh unweathered surfaces</p> <p>GOOD - Rough, slightly weathered surfaces</p> <p>FAIR - Smooth, moderately weathered and altered surfaces</p> <p>POOR - Very smooth, occasionally slickensided surfaces with compact coatings or fillings with angular fragments</p> <p>VERY POOR - Very smooth, slickensided or highly weathered surfaces with soft clay coatings or fillings</p>																

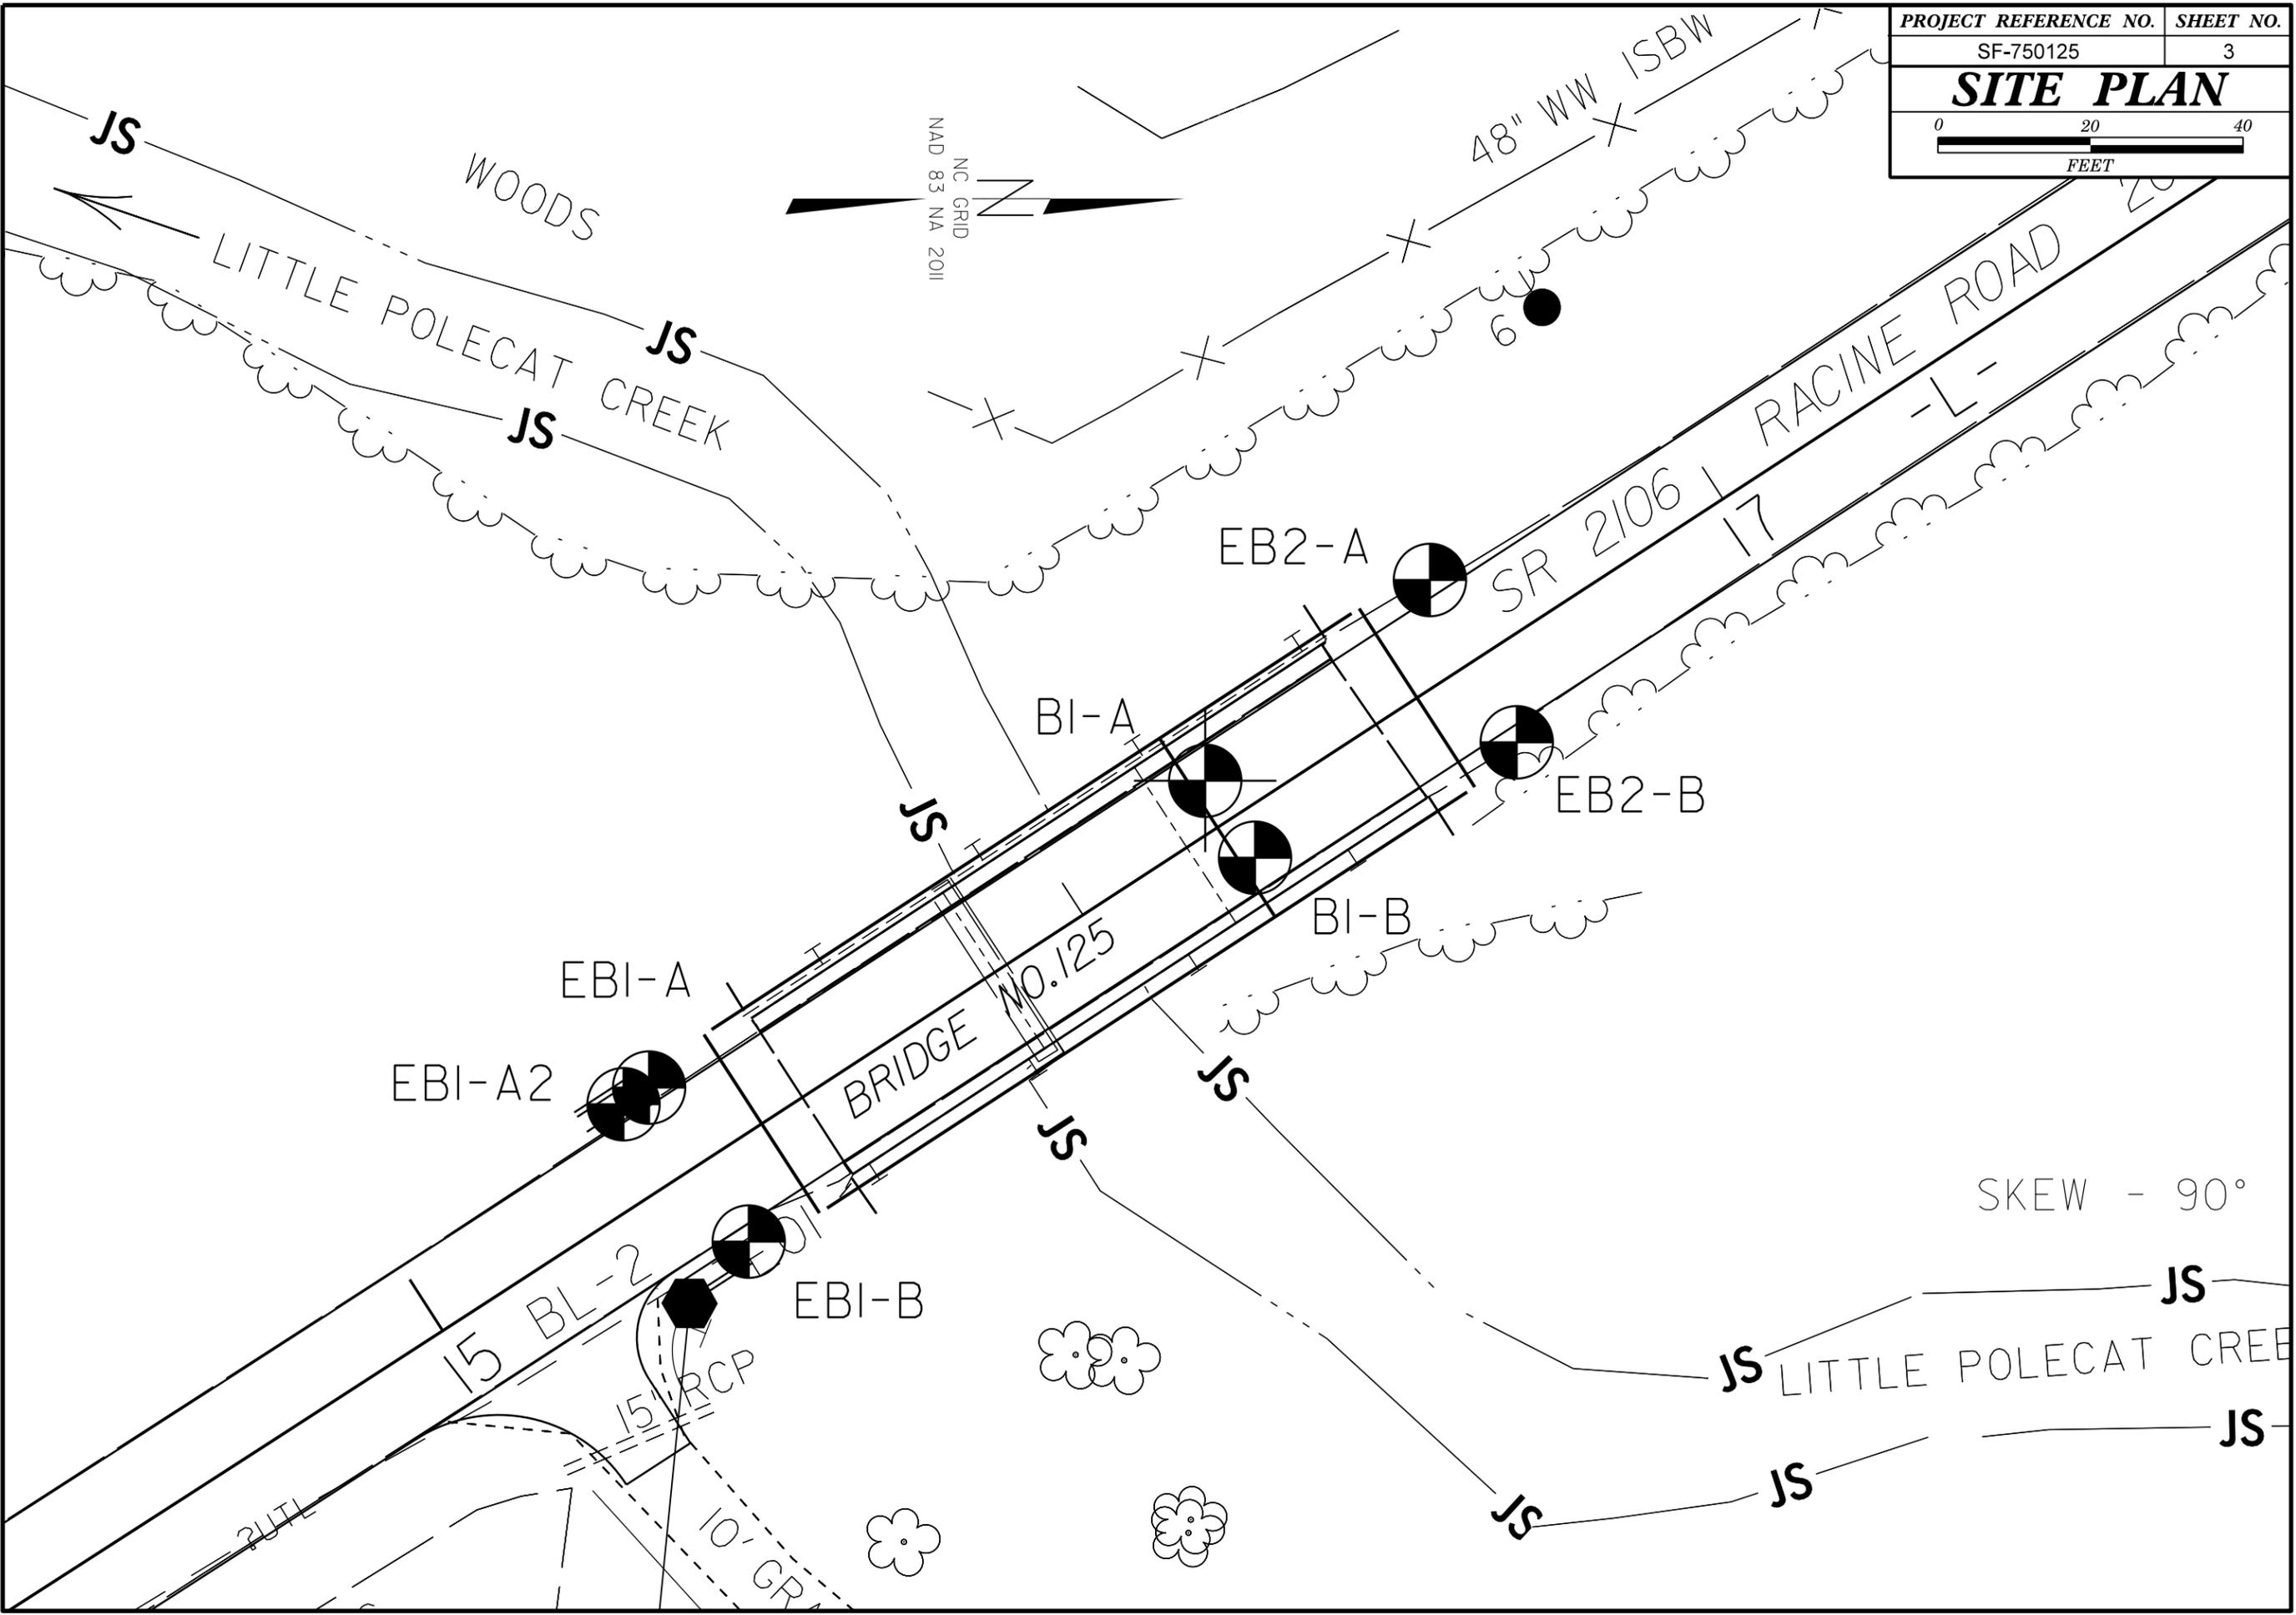

JS

WOODS

LITTLE POLECAT CREEK

48" WW ISBW

NAD 83 NA 2011
NC GRID

SITE PLAN

0 20 40
FEET

EB2-A

SR 2106 | RACINE ROAD

BI-A

EB2-B

BRIDGE NO. 125

BI-B

EBI-A

EBI-A2

SKEW - 90°

15 BL-2


EBI-B

LITTLE POLECAT CREEK


15 RCP

20' UTI

10' GRA

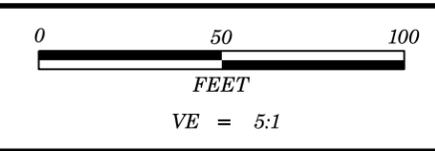

PROJECT REFERENCE NO.	SHEET NO.
SF-750125	4
BRIDGE NO. 125 PROFILE ON -L-	

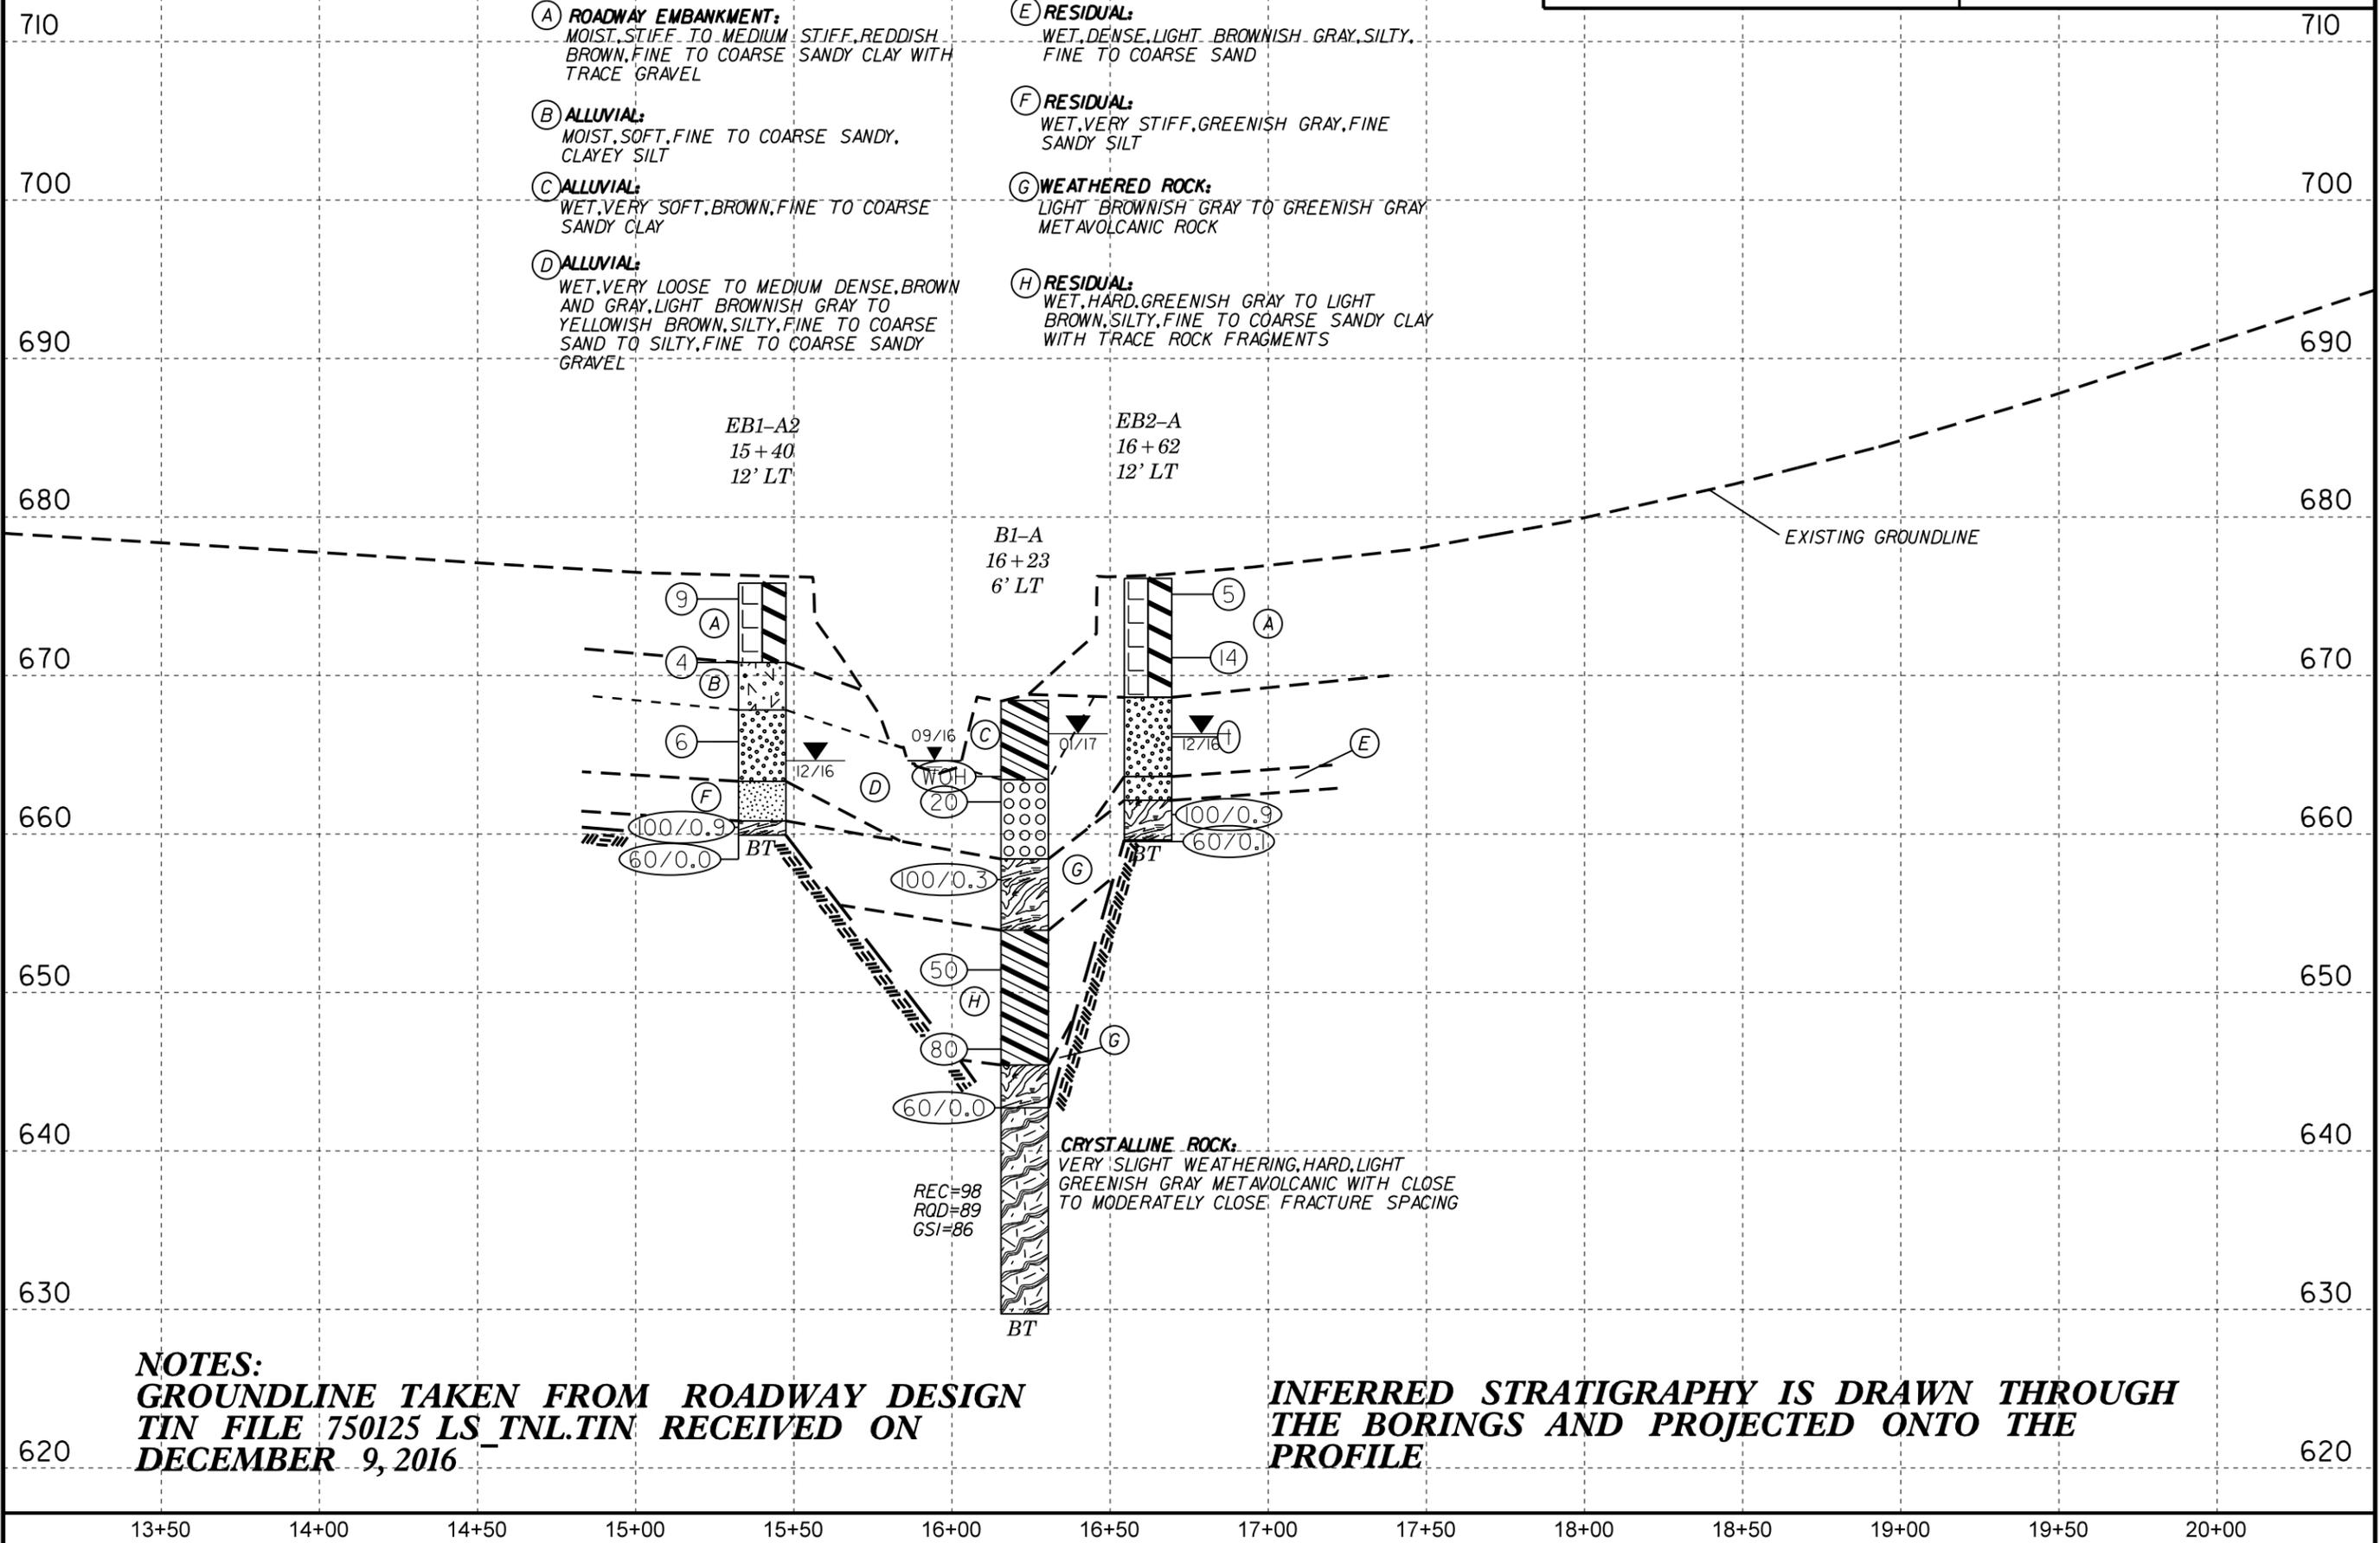


- (A) **ROADWAY EMBANKMENT:**
MOIST, STIFF TO MEDIUM STIFF, REDDISH BROWN, FINE TO COARSE SANDY CLAY WITH TRACE GRAVEL
- (B) **ALLUVIAL:**
MOIST, SOFT, FINE TO COARSE SANDY, CLAYEY SILT
- (C) **ALLUVIAL:**
WET, VERY SOFT, BROWN, FINE TO COARSE SANDY CLAY
- (D) **ALLUVIAL:**
WET, VERY LOOSE TO MEDIUM DENSE, BROWN AND GRAY, LIGHT BROWNISH GRAY TO YELLOWISH BROWN, SILTY, FINE TO COARSE SAND TO SILTY, FINE TO COARSE SANDY GRAVEL

- (E) **RESIDUAL:**
WET, DENSE, LIGHT BROWNISH GRAY, SILTY, FINE TO COARSE SAND
- (F) **RESIDUAL:**
WET, VERY STIFF, GREENISH GRAY, FINE SANDY SILT
- (G) **WEATHERED ROCK:**
LIGHT BROWNISH GRAY TO GREENISH GRAY METAVOLCANIC ROCK
- (H) **RESIDUAL:**
WET, HARD, GREENISH GRAY TO LIGHT BROWN, SILTY, FINE TO COARSE SANDY CLAY WITH TRACE ROCK FRAGMENTS


CRYSTALLINE ROCK:
VERY SLIGHT WEATHERING, HARD, LIGHT GREENISH GRAY METAVOLCANIC WITH CLOSE TO MODERATELY CLOSE FRACTURE SPACING

NOTES:
GROUNDLINE TAKEN FROM ROADWAY DESIGN TIN FILE 750125 LS_TNL.TIN RECEIVED ON DECEMBER 9, 2016


INFERRED STRATIGRAPHY IS DRAWN THROUGH THE BORINGS AND PROJECTED ONTO THE PROFILE

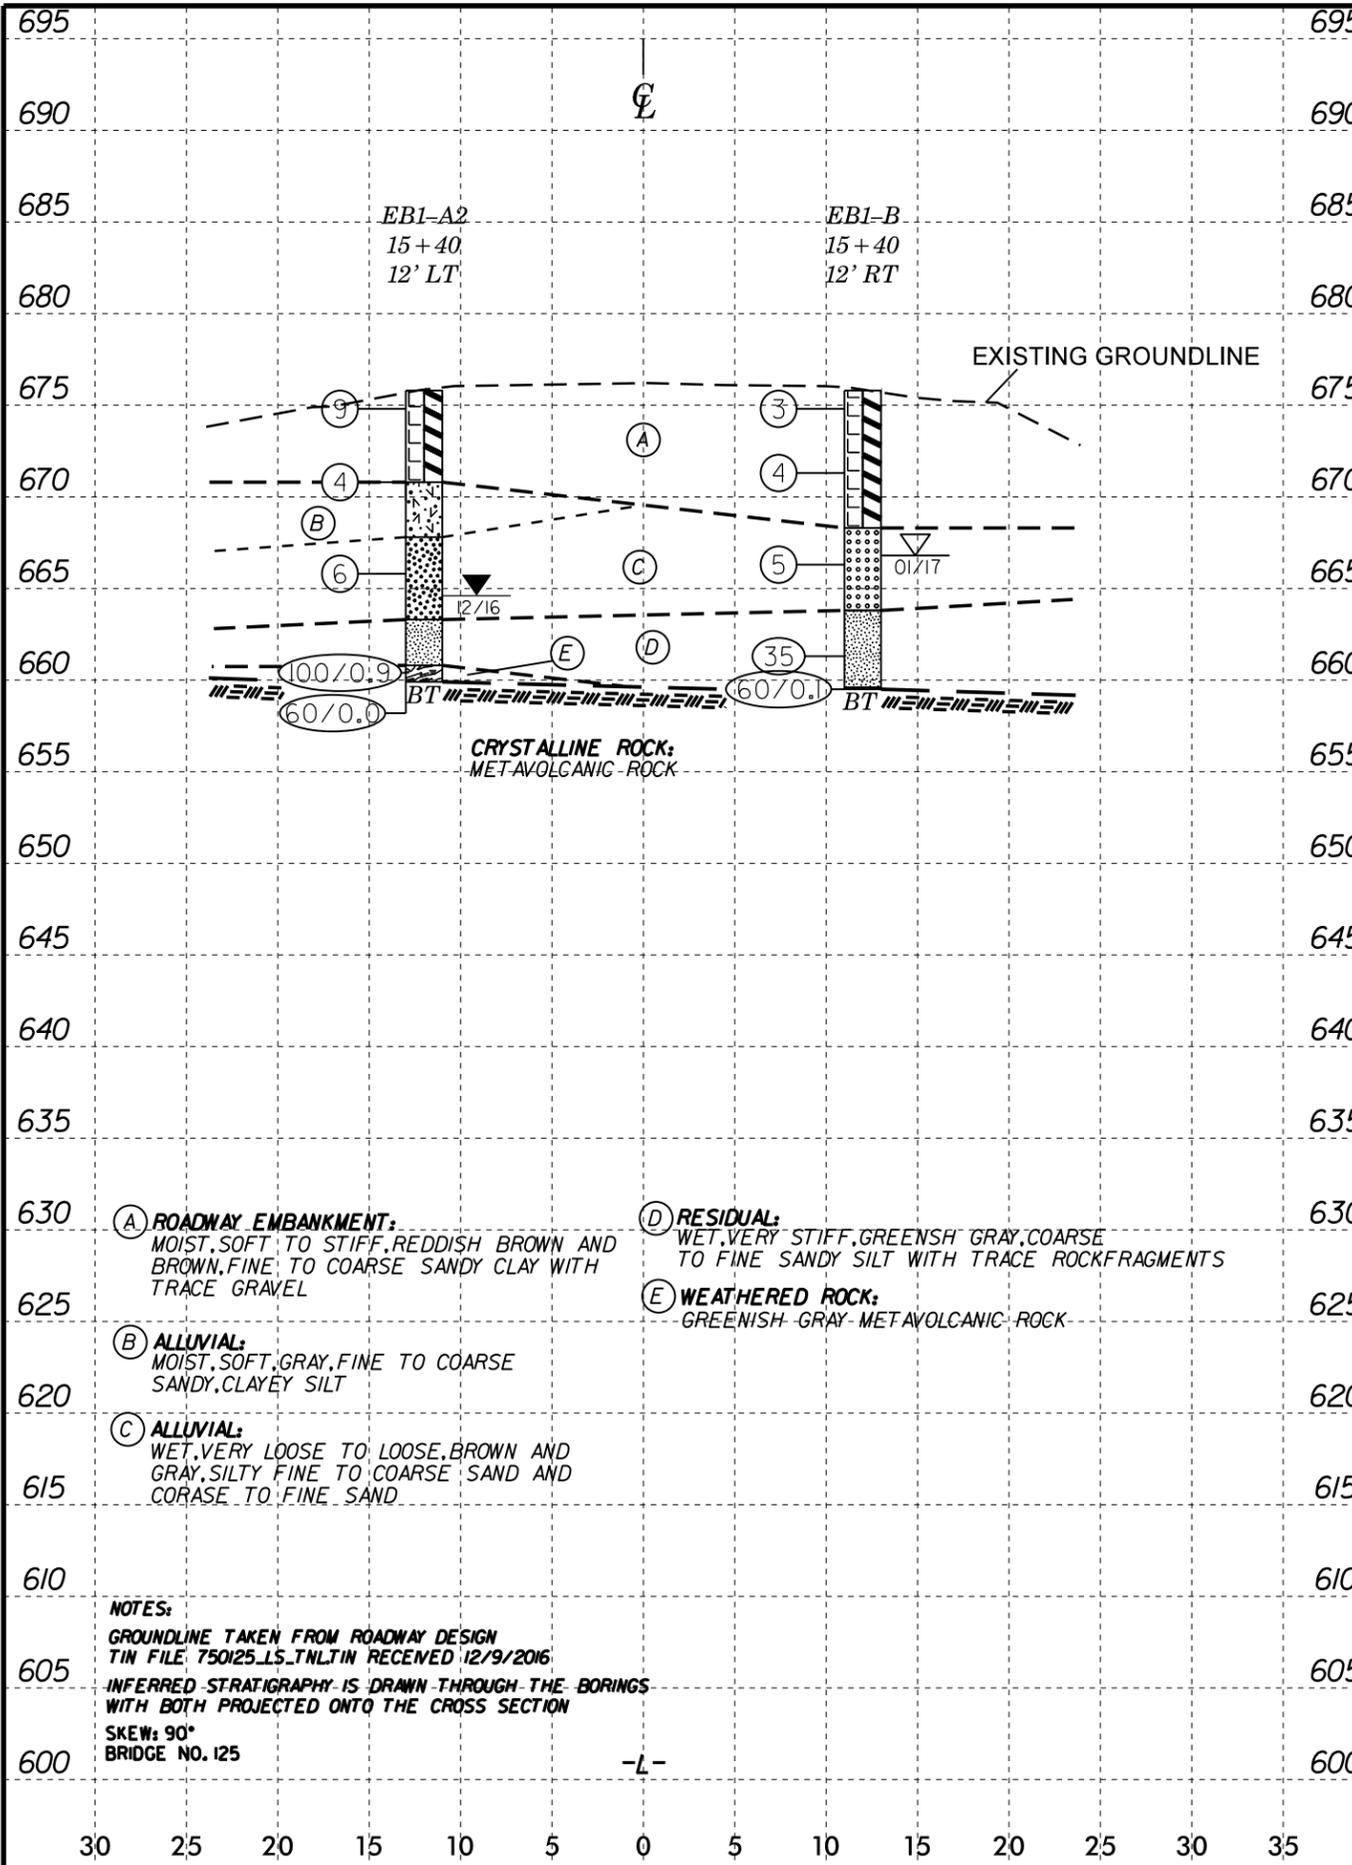

END BENT NO. 1 CROSS SECTION AT STA. 15+51

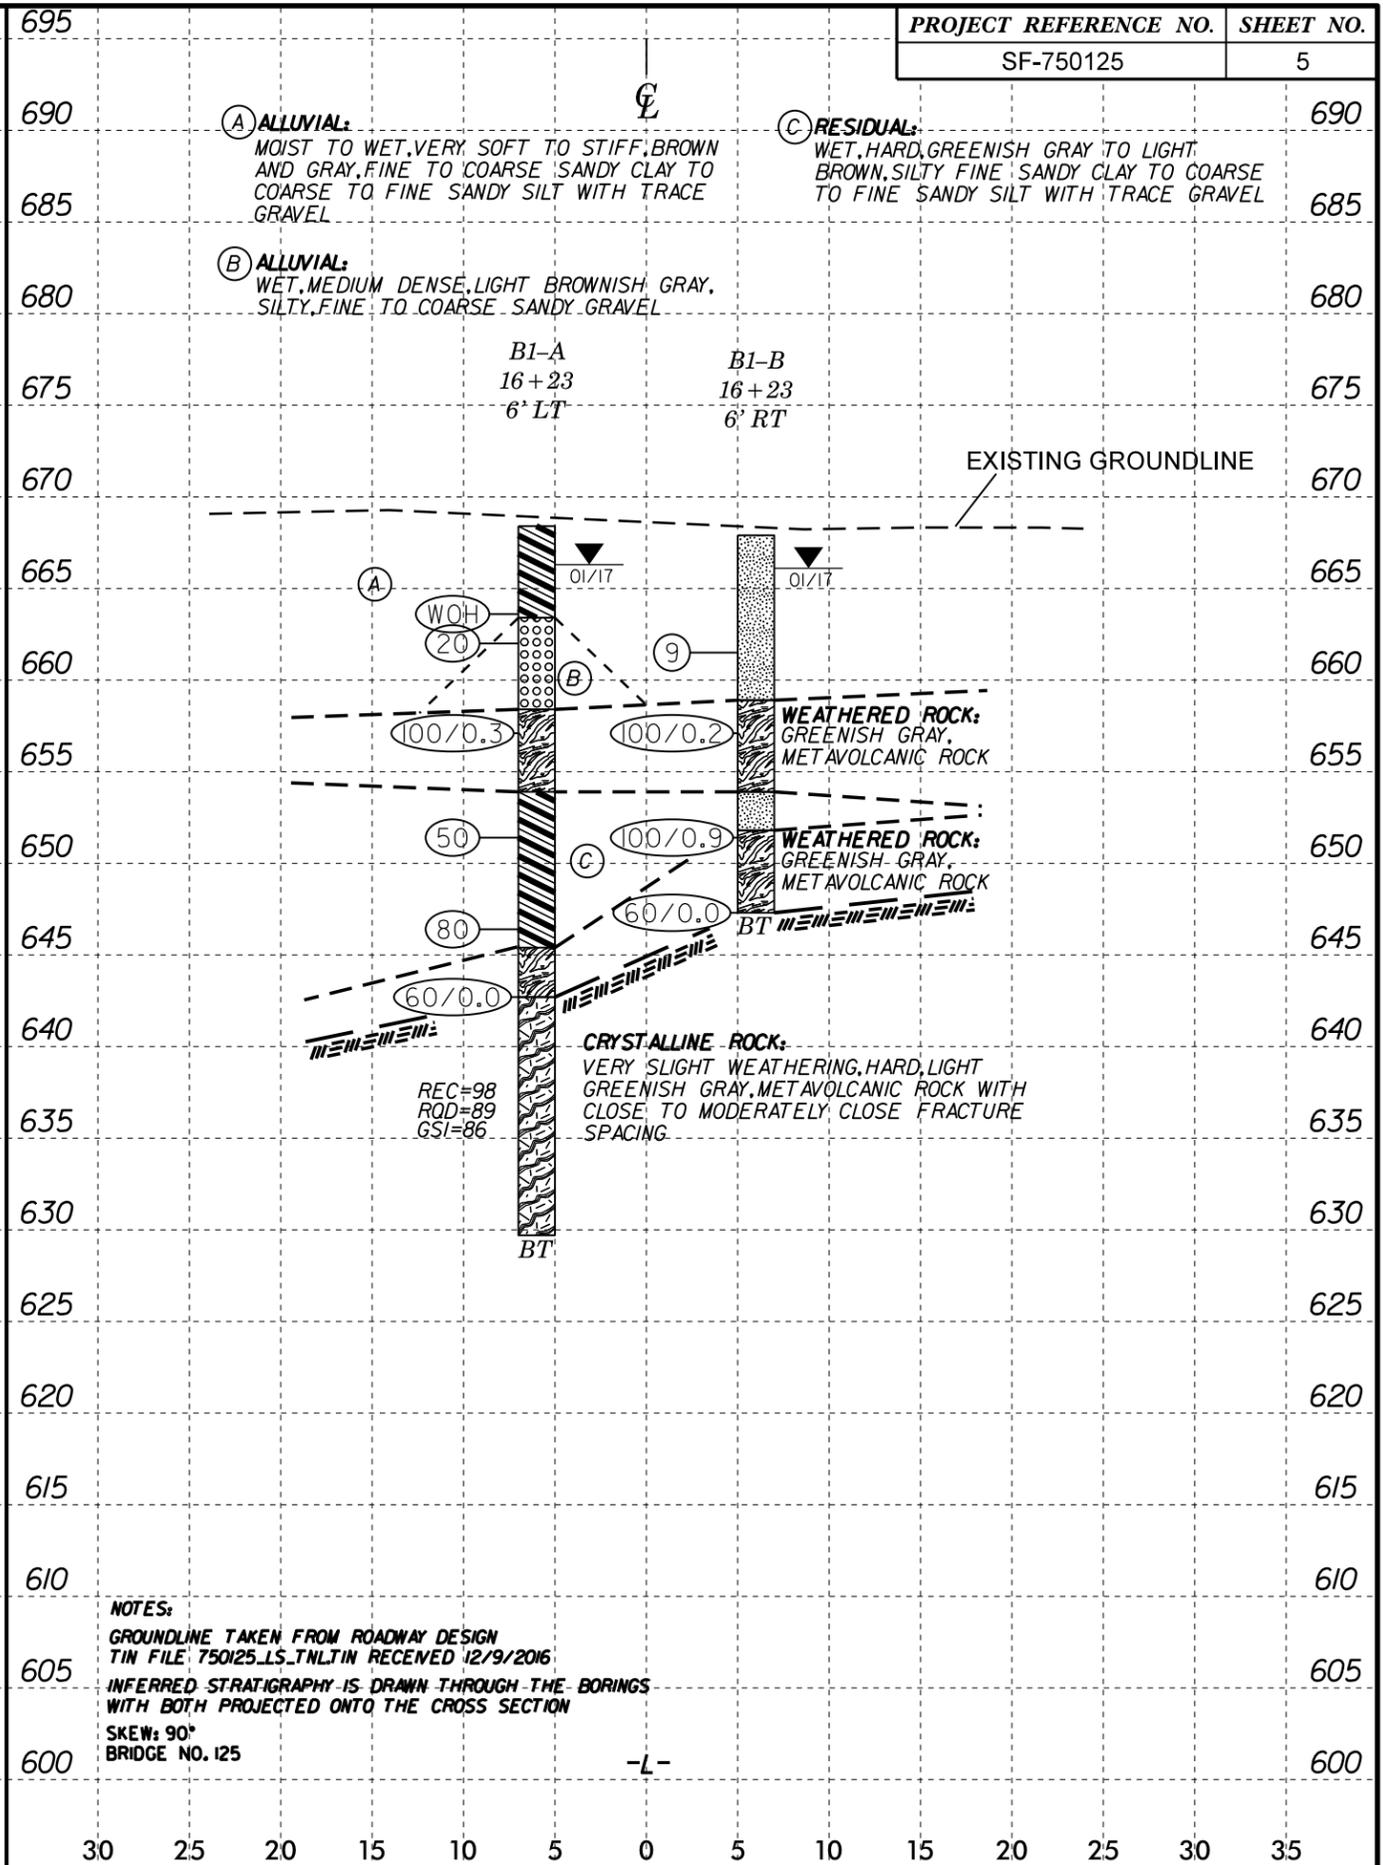

BENT NO. 1 CROSS SECTION AT STA. 16+21

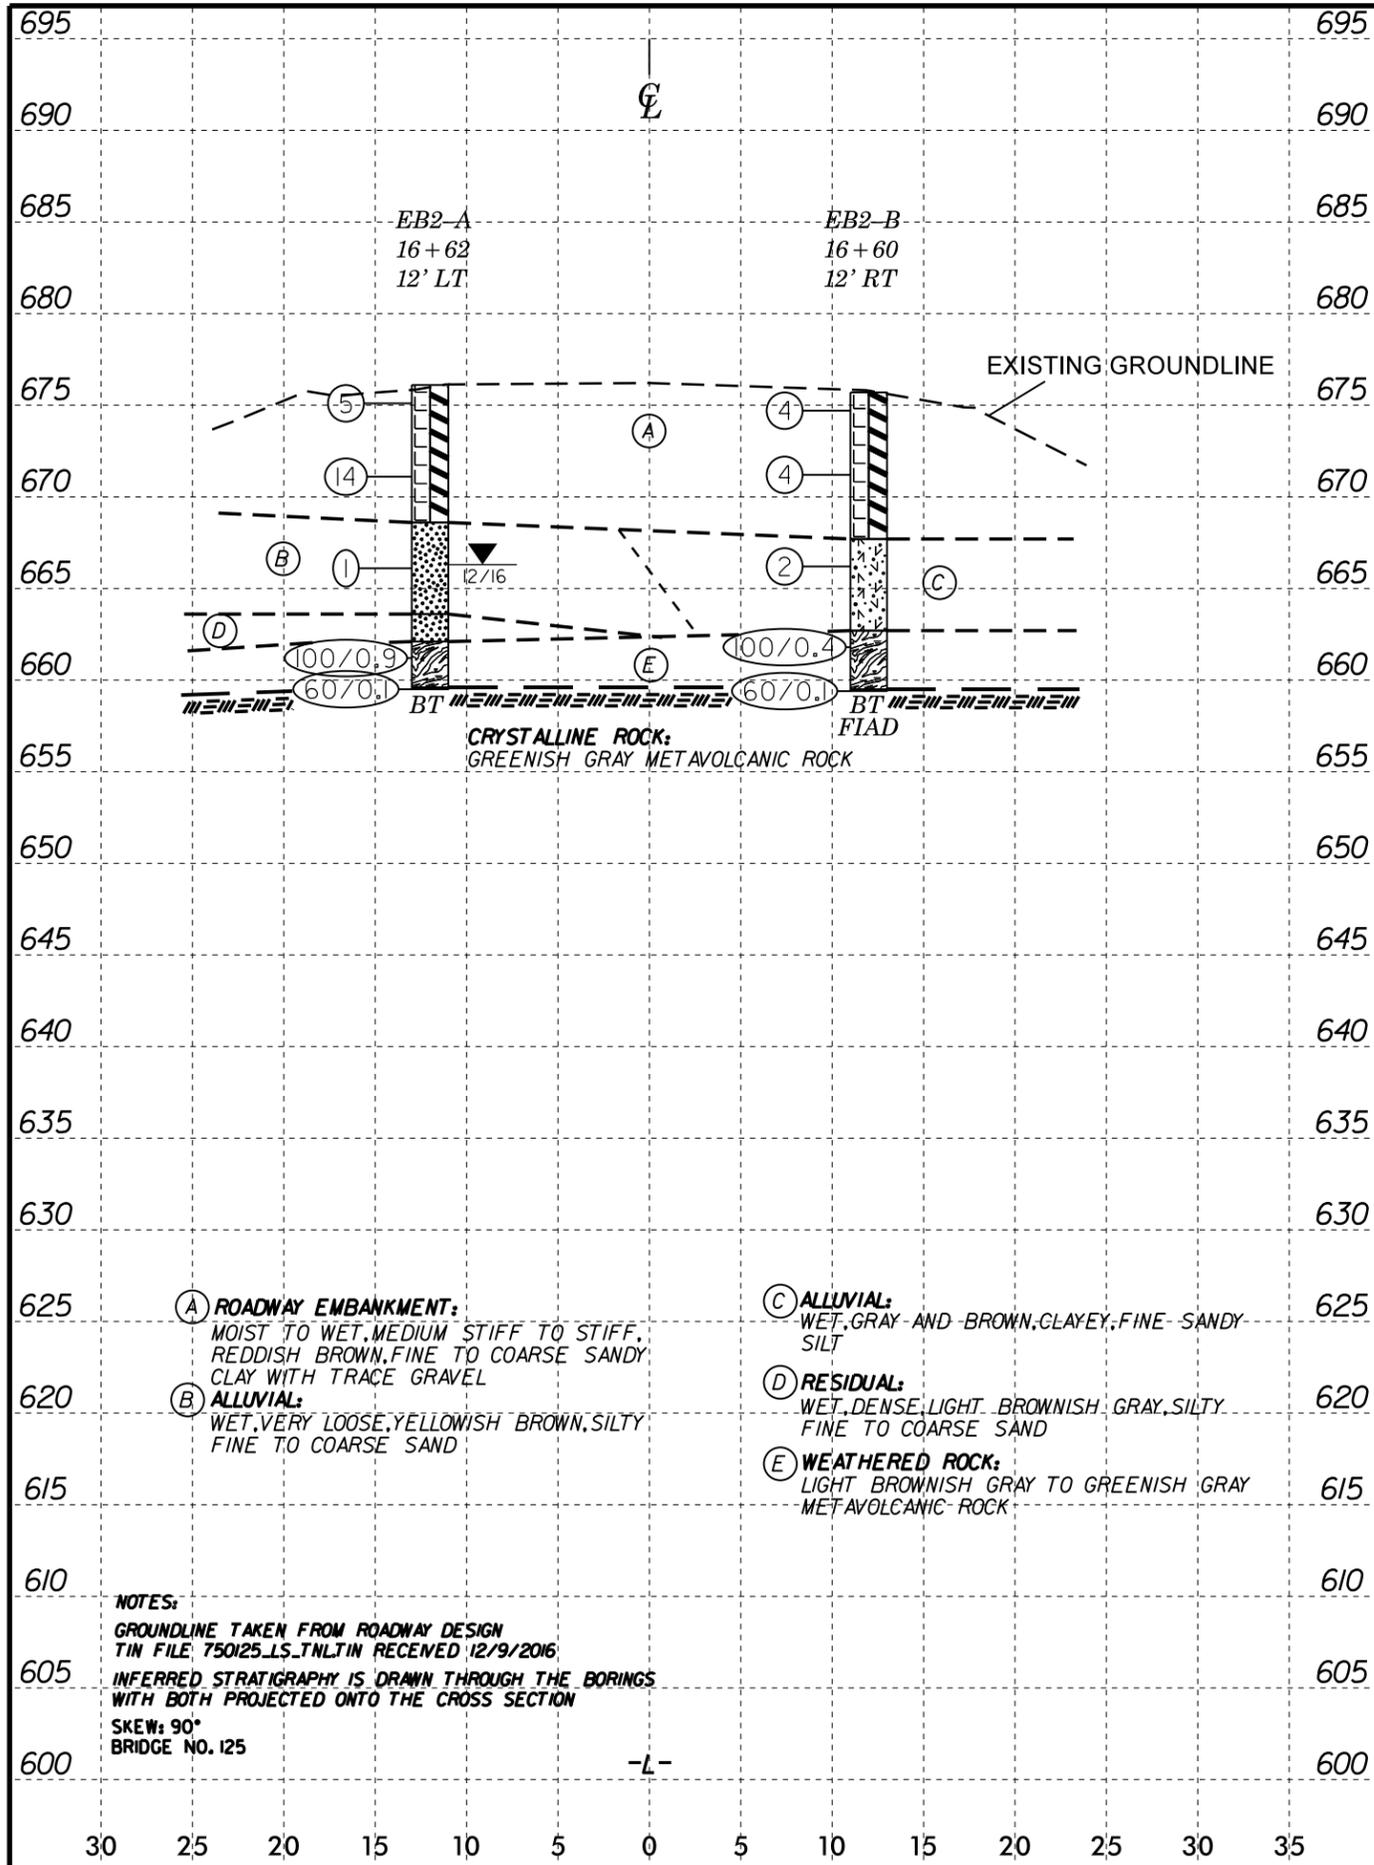

GEOTECHNICAL BORING REPORT

BORE LOG

WBS 17BP.8.R.117		TIP SF-750125		COUNTY RANDOLPH		GEOLOGIST D. Kubinski									
SITE DESCRIPTION Bridge No. 125 on SR 2106 (Racine Road) over Little Polecat Creek							GROUND WTR (ft)								
BORING NO. EB1-A		STATION 15+36		OFFSET 12 ft LT		ALIGNMENT -L-									
COLLAR ELEV. 675.6 ft		TOTAL DEPTH 11.9 ft		NORTHING 773,103		EASTING 1,776,511									
DRILL RIG/HAMMER EFF./DATE TRI8016 MOBILE B-57 90% 02/22/2016			DRILL METHOD H.S. Augers		HAMMER TYPE Automatic										
DRILLER Estep, J. E.		START DATE 12/29/16		COMP. DATE 12/29/16		SURFACE WATER DEPTH N/A									
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION	DEPTH (ft)	
			0.5ft	0.5ft	0.5ft	0	25	50	75	100					
680															
675	675.6	0.0	2	3	2								M	675.6 GROUND SURFACE	0.0
														ROADWAY EMBANKMENT Reddish Brown, Fine Sandy CLAY with Trace Gravel	
670	671.7	3.9	13	8	4								M	671.2 ALLUVIAL Brown and Gray, Clayey, Fine to Coarse SAND with Trace Gravel	4.4
665	666.7	8.9	1	2	5								W	665.6 Silty, Fine to Coarse SAND	10.0
														663.7 Boring Terminated at Elevation 663.7 ft in ALLUVIUM: Silty SAND	11.9
														Notes: Auger sheared off in boring during drilling when hard drilling was encountered	


WBS 17BP.8.R.117		TIP SF-750125		COUNTY RANDOLPH		GEOLOGIST D. Kubinski									
SITE DESCRIPTION Bridge No. 125 on SR 2106 (Racine Road) over Little Polecat Creek							GROUND WTR (ft)								
BORING NO. EB1-A2		STATION 15+40		OFFSET 12 ft LT		ALIGNMENT -L-									
COLLAR ELEV. 675.8 ft		TOTAL DEPTH 15.9 ft		NORTHING 773,106		EASTING 1,776,509									
DRILL RIG/HAMMER EFF./DATE TRI8016 MOBILE B-57 90% 02/22/2016			DRILL METHOD H.S. Augers		HAMMER TYPE Automatic										
DRILLER Estep, J. E.		START DATE 12/29/16		COMP. DATE 12/29/16		SURFACE WATER DEPTH N/A									
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION	DEPTH (ft)	
			0.5ft	0.5ft	0.5ft	0	25	50	75	100					
680															
675	675.8	0.0	2	5	4								M	675.8 GROUND SURFACE	0.0
														ROADWAY EMBANKMENT Reddish Brown and Brown, Fine to Coarse Sandy CLAY with Trace Gravel	
670	671.8	4.0	1	2	2								M	670.8 ALLUVIAL Gray, Fine to Coarse Sandy, Clayey SILT	5.0
														667.8 Brown, and Gray, Silty, Fine to Coarse SAND	8.0
665	666.8	9.0	WOH	WOH	6								W	663.3 RESIDUAL Greenish Gray, Fine Sandy SILT	12.5
														660.8 WEATHERED ROCK Greenish Gray, FELSIC METAVOLCANIC ROCK	15.0
660	659.9	15.9	14	11	89/0.4								W	659.9 Boring Terminated with Standard Penetration Test Refusal at Elevation 659.9 ft on CRYSTALLINE ROCK: METAVOLCANIC ROCK	15.9

NCDOT BORE DOUBLE SF750125_GEO_BRDG_GINT.GPJ NC_DOT.GDT 2/16/17

CORE PHOTOGRAPHS

B1-A

BOXES 1 and 2: 25.7 TO 38.7 FEET

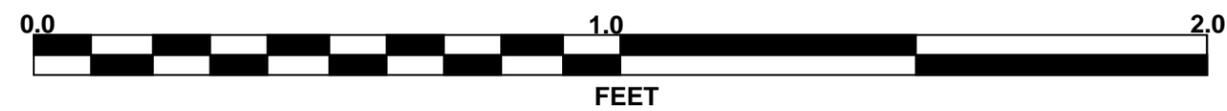

GEOTECHNICAL BORING REPORT

BORE LOG

WBS 17BP.8.R.117		TIP SF-750125		COUNTY RANDOLPH		GEOLOGIST T. Wells										
SITE DESCRIPTION Bridge No. 125 on SR 2106 (Racine Road) over Little Polecat Creek							GROUND WTR (ft)									
BORING NO. B1-B		STATION 16+23		OFFSET 6 ft RT		ALIGNMENT -L-	0 HR. 1.8									
COLLAR ELEV. 667.9 ft		TOTAL DEPTH 20.6 ft		NORTHING 773,186		EASTING 1,776,479	24 HR. FIAD									
DRILL RIG/HAMMER EFF./DATE TRI8016 MOBILE B-57 90% 02/22/2016				DRILL METHOD Mud Rotary		HAMMER TYPE Automatic										
DRILLER Estep, J. E.		START DATE 01/05/17		COMP. DATE 01/06/17		SURFACE WATER DEPTH N/A										
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION			
			0.5ft	0.5ft	0.5ft	0	25	50	75	100			ELEV. (ft)	DEPTH (ft)		
670														667.9	0.0	GROUND SURFACE
665																ALLUVIAL Gray, Coarse to Fine Sandy SILT with Trace Gravel
660	662.5	5.4	1	3	6							M		658.9	9.0	WEATHERED ROCK Greenish Gray, FELSIC METAVOLCANIC ROCK
655	657.3	10.6	100/0.2							100/0.2				653.9	14.0	RESIDUAL Greenish Gray, Coarse to Fine Sandy SILT with Trace Gravel
650	652.3	15.6	25	75/0.4						100/0.9		M		651.8	16.1	WEATHERED ROCK Greenish Gray, FELSIC METAVOLCANIC ROCK
	647.3	20.6	60/0.0							60/0.0				647.3	20.6	Boring Terminated with Standard Penetration Test Refusal at Elevation 647.3 ft on CRYSTALLINE ROCK: METAVOLCANIC ROCK

NCDOT BORE DOUBLE_SF750125_GEO_BRDG_GINT.GPJ NC_DOT.GDT 2/16/17

GEOTECHNICAL BORING REPORT

BORE LOG

WBS 17BP.8.R.117	TIP SF-750125	COUNTY RANDOLPH	GEOLOGIST D. Kubinski
SITE DESCRIPTION Bridge No. 125 on SR 2106 (Racine Road) over Little Polecat Creek			GROUND WTR (ft)
BORING NO. EB2-A	STATION 16+62	OFFSET 12 ft LT	ALIGNMENT -L-
COLLAR ELEV. 676.1 ft	TOTAL DEPTH 16.6 ft	NORTHING 773,209	EASTING 1,776,442
DRILL RIG/HAMMER EFF./DATE TRI8016 MOBILE B-57 90% 02/22/2016		DRILL METHOD H.S. Augers	HAMMER TYPE Automatic
DRILLER Estep, J. E.	START DATE 12/29/16	COMP. DATE 12/29/16	SURFACE WATER DEPTH N/A

ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION	DEPTH (ft)	
			0.5ft	0.5ft	0.5ft	0	25	50	75	100					
680															
675	676.1	0.0	2	3	2								M	GROUND SURFACE	0.0
														ROADWAY EMBANKMENT Reddish Brown, Fine to Coarse Sandy CLAY with Trace Gravel	
670	672.1	4.0	1	6	8								M		
665	667.1	9.0	WOH	WOH	1									ALLUVIAL Yellowish Brown, Silty, Fine to Coarse SAND	7.5
														RESIDUAL Yellowish Brown, Silty, Fine to Coarse SAND	12.5
	662.1	14.0	23	77/0.4										WEATHERED ROCK Light Brownish Gray FELSIC METAVOLCANIC ROCK	14.0
660	659.6	16.5												WEATHERED ROCK Greenish Gray FELSIC METAVOLCANIC ROCK	16.5
														CRYSTALLINE ROCK Greenish Gray FELSIC METAVOLCANIC ROCK	16.6
														Boring Terminated with Standard Penetration Test Refusal at Elevation 659.5 ft in CRYSTALLINE ROCK: METAVOLCANIC ROCK	

WBS 17BP.8.R.117	TIP SF-750125	COUNTY RANDOLPH	GEOLOGIST T. Wells
SITE DESCRIPTION Bridge No. 125 on SR 2106 (Racine Road) over Little Polecat Creek			GROUND WTR (ft)
BORING NO. EB2-B	STATION 16+60	OFFSET 12 ft RT	ALIGNMENT -L-
COLLAR ELEV. 675.7 ft	TOTAL DEPTH 16.3 ft	NORTHING 773,220	EASTING 1,776,464
DRILL RIG/HAMMER EFF./DATE TRI8016 MOBILE B-57 90% 02/22/2016		DRILL METHOD H.S. Augers	HAMMER TYPE Automatic
DRILLER Estep, J. E.	START DATE 01/06/17	COMP. DATE 01/06/17	SURFACE WATER DEPTH N/A

ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION	DEPTH (ft)	
			0.5ft	0.5ft	0.5ft	0	25	50	75	100					
680															
675	675.7	0.0	1	2	2								M	GROUND SURFACE	0.0
														ROADWAY EMBANKMENT Reddish Brown, Fine Sandy, Silty CLAY	
670	672.2	3.5	1	2	2								W		
665	667.2	8.5	WOH	WOH	2								W	ALLUVIAL Gray and Brown, Fine Sandy, Clayey SILT	8.0
														WEATHERED ROCK Greenish Gray FELSIC METAVOLCANIC ROCK	13.0
	662.2	13.5	100/0.4												
660	659.5	16.2												WEATHERED ROCK Greenish Gray FELSIC METAVOLCANIC ROCK	16.2
														CRYSTALLINE ROCK FELSIC METAVOLCANIC ROCK	16.3
														Boring Terminated with Standard Penetration Test Refusal at Elevation 659.4 ft in CRYSTALLINE ROCK: METAVOLCANIC ROCK	

NCDOT BORE DOUBLE_SF750125_GEO_BRDG_GINT.GPJ NC_DOT.GDT 2/16/17

SITE PHOTOGRAPHS



View Looking Northwest along -L- from End Bent 1



Profile of Existing Bridge from West of End Bent No. 1